

OE Lighting technical data

LED Downlight

Create new gree life - Energy saving/Healthy/Eco-friendly



www.oe-lighting.com
info@oe-lighting.com

LED DOWNLIGHT



Model No.	Watts(W)	Light Output(lm)	Voltage(V)	Light Color(K)	Beam Angle(Degree)
LED80002-CW	12	800	AC200-240	6000-6500K	60
LED80002-WW	12	800	AC200-240	2800-3000K	60
LED80002-NW	12	800	AC200-240	4000-4500K	60


Specifications	Values
Operational Temperature Range	-20~40°C
Material	Aluminum + PA6
LED Chip	CREE
Color	Black
IP rating	IP65
Optional Bezel	White Bezel/Polished Chrome/Brushed steel

Item	Test Conditions	Min.	Typ.	Max.
Input Voltage (V.)	AC	200	220	240
Input current (A,)	AC220V	---	0.09	---
Input Power (W,)	AC(all)	---	12	----
Input Frequency (Hz)	AC	---	50/60Hz	---
Power Factor (PF)	AC(all)	0.655		
Output voltage (V)	DC	---	---	---

LED DOWNLIGHT



Drawing

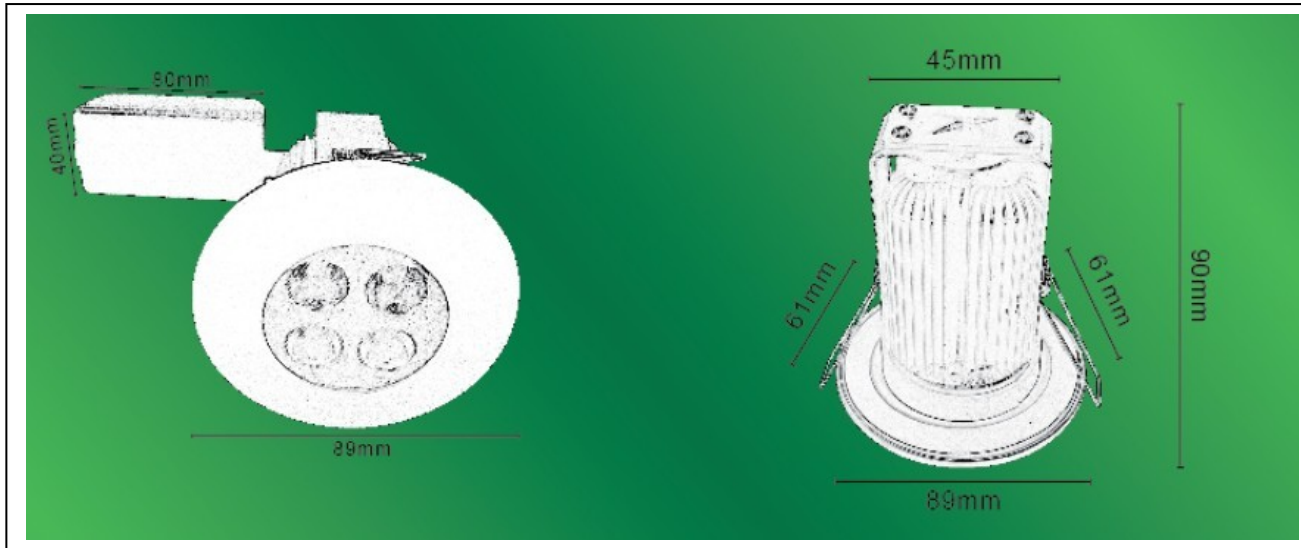

Packing

Weight/carton	12/14kg
Size of box	19*12*10.5cm
Size of Carton	59*38*33CM
Qty/ Carton	27PCS

LED DOWNLIGHT



Category	Specifications	Unit
Watts	12	W
Lumens per Watt(Efficacy)	66	Lm/W
Light Output	800	lm
Light Color(CCT)	2800-6500	K
Beam Angle	60	'(degree)
Color Accuracy(CRI)	80	Ra
Product Weight	450	G
Rating Life	30000	H
Base	Line interface	
Input Voltage(AC)	200-240	V

Goniophotometer Test Report

